



**ERCO C632 EF**  
**ERCO C636 EF**

***C-Line***

*Lifting equipment*



3200



3600



**Electrohydraulic underbody double scissors type lift,**  
for tyre specialists, car workshops, and body repairers



## ERCO C636 EF - ERCO C632 EF

**Electrohydraulic underbody double scissors type lift**, for tyre specialists, car workshops, and body repairers. Alignment of the runways with a dual **MASTER/SLAVE** circuit (**two cylinders per runboard**) without mechanical safety racks. Runboards version with extensions or flaps (F).

**All models available in both on-floor and flush installation versions.**



- Unique arm geometry for maximum stiffness and minimised space usage.
- Special **lift linkage**, for lifting loads even from the lowest lift height.



- **Runways with suspended flaps** which also act as vehicle access ramps.



- **Adjustment bolts** with rubber to cushion the end of the stroke.



- **Generously sized, self-lubricating** sliding blocks.

### SUPPLIED ACCESSORIES

- Self-lubricating bushings on all rotating parts
- Set of 4 rubber pads

### OPTIONAL


- Pair of cross pieces and pads for off-road vehicles
- Kit for pit installations

### TECHNICAL DATA


Model	Lift capacity	Lifting time	Three phase motor	Single phase motor	Max. lifting height	Lift min. height
<b>ERCO C632 EF</b>	3200 kg	45 s	230/400V - 3kW	230V - 3kW	2040 mm	105 mm
<b>ERCO C636 EF</b>	3600 kg		3Ph - 50/60Hz	1Ph - 50/60Hz		110 mm

### OVERALL DIMENSIONS

#### ERCO C632 EF

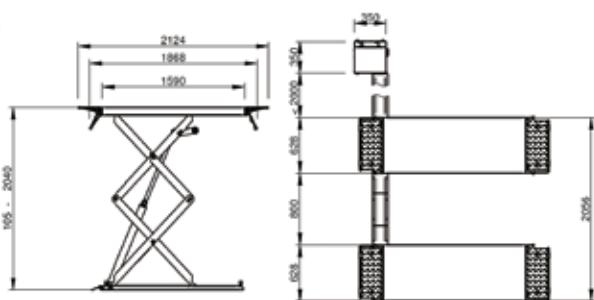

#### ERCO C636 EF

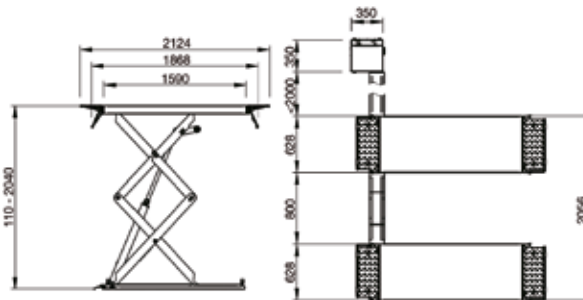

NEXION SPA - [www.corghi.com](http://www.corghi.com) - [info@corghi.com](mailto:info@corghi.com)

Designed in  
ITALY

